



Details

Undersurfacing

Area - Approx 82 sqm loosefill
 67 sqm solidfill

Material Specifications


Frame - Hot-dipped galvanised steel -140mm OD
 Chains - 6mm stainless steel
 Seat - reinforced rubber membrane on a hot-dipped galvanised steel frame

Other required information

Spare Parts - Available to order
 Largest Part - Post - 5.9 x 1.6 x 0.3m
 Highest Point - 4m
 Heaviest Part - Post :

	0-20 kg	One person lift
	21-40 kg	Two person lift
X	41kg +	Machinery Assistance

Minimum Undersurfacing Requirements

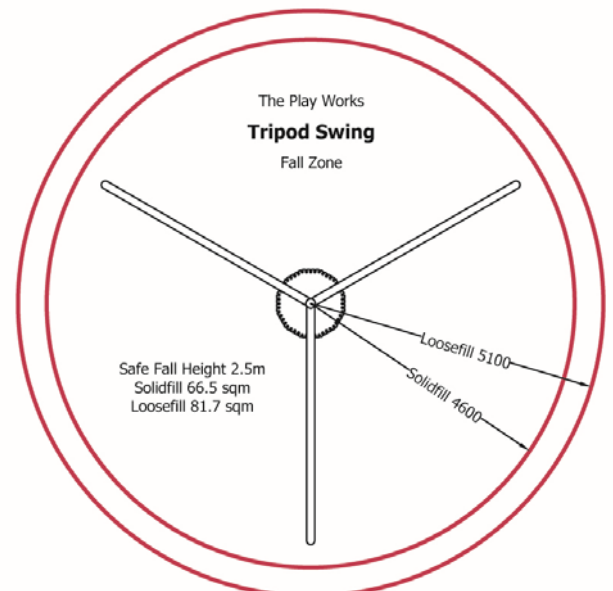

Standards

AS/NZS 4422 - 1996, AS/NZS 4486.1, AS 4685 - 2014 pt1 - pt6

Applications

Age Group - 5 years and up
 Level of Supervision - Young children should be supervised and inappropriate activities discouraged
 Playspaces - Public parks, schools, early childhood centres, commercial play areas
 Environment - Shade preferred for user comfort and protection.
 - Salt air environments may reduce life of steel