



Shade roof option



**Details**

**Undersurfacing**

Area - Approx 45 sqm

**Pack includes:**

- Deck #1—1.4m x 1.85m
- Deck #2—1.85m x 1.85m
- Steering wheel panel
- Telescope panel
- Firepole
- Slide

**Material specifications**

- Posts - Powder-coated galvanised steel
- Frames & Climbers - Powder-coated galvanised steel
- Platforms - Timber: 90x32mm cypress
- Roofs - Powder-coated galvanised steel & vinyl
- Panels - HDPE
- Slides - Fibreglass
- Fixings - Stainless steel

**Minimum Undersurfacing Requirements**


**Other required information**

- Spare Parts - Available to order
- Largest Part - Frame: 2.7 x 1.0 x 0.1 m
- Posts: 2.3 x 0.1 x 0.1m
- Highest Point - 2.3m

**With shade roof option**

- Largest Part - Roof truss: 2.4 x 0.6 x 0.3m
- Posts: 3.6 x 0.1 x 0.1m
- Highest Point - 3.9m
- Heaviest Part - Frame:

	0-20 kg	One person lift
X	21-40 kg	Two person lift
	41kg +	Machinery Assistance

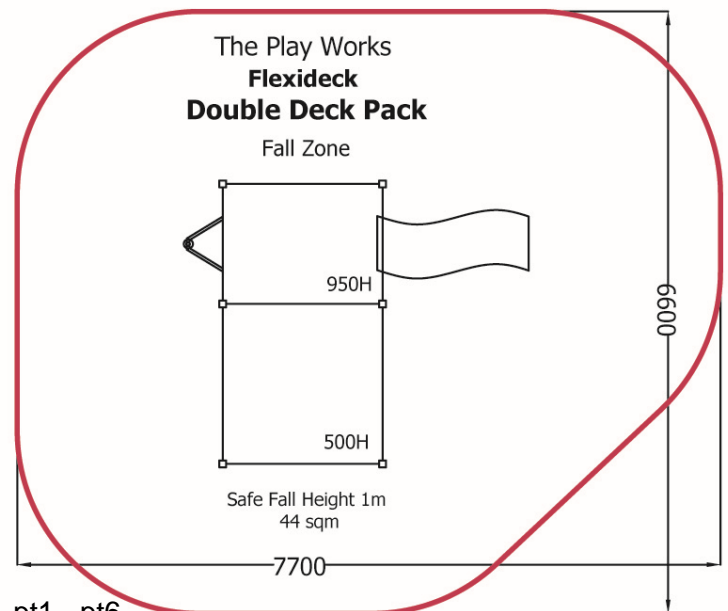

**Standards**

AS/NZS 4422, AS/NZS 4486.1, AS 4685, AS 4685 - 2014 pt1 - pt6

**Applications**

- Age Group - 3 years and up
- Level of Supervision - Young children should be supervised and inappropriate activities discouraged
- Playspaces - Supervised play spaces: Schools, early childhood centres
- Environment - Shade preferred for user comfort and protection.
- Salt air environments may reduce life of steel
- Vandalism Resistance - Low susceptibility