

Log Balance Trail 01

A-NAT-2238



Specifications

Age range: All ages

Number of play elements: 10

Equipment size: 8825 x 3553mm

Equipment height: 1700mm

Fall zone: 11900 x 6600mm

Max fall height: 550mm

Play Types



Materials

Material specs

Frame: Ironbark Timber / Stainless Steel


Fasteners: Stainless Steel

Powder Coating: Dulux / Interpon


Log Balance Trail 01

A-NAT-2238

Elevation

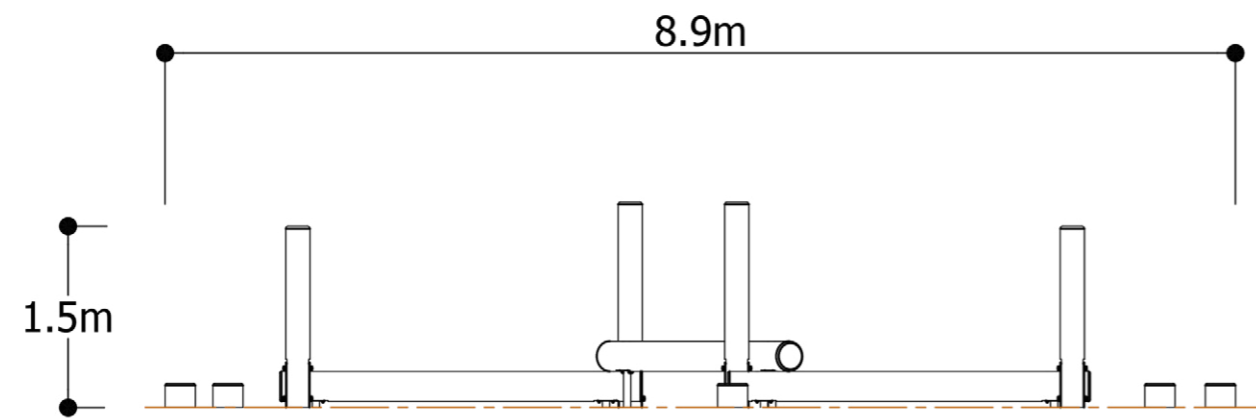

Plan View

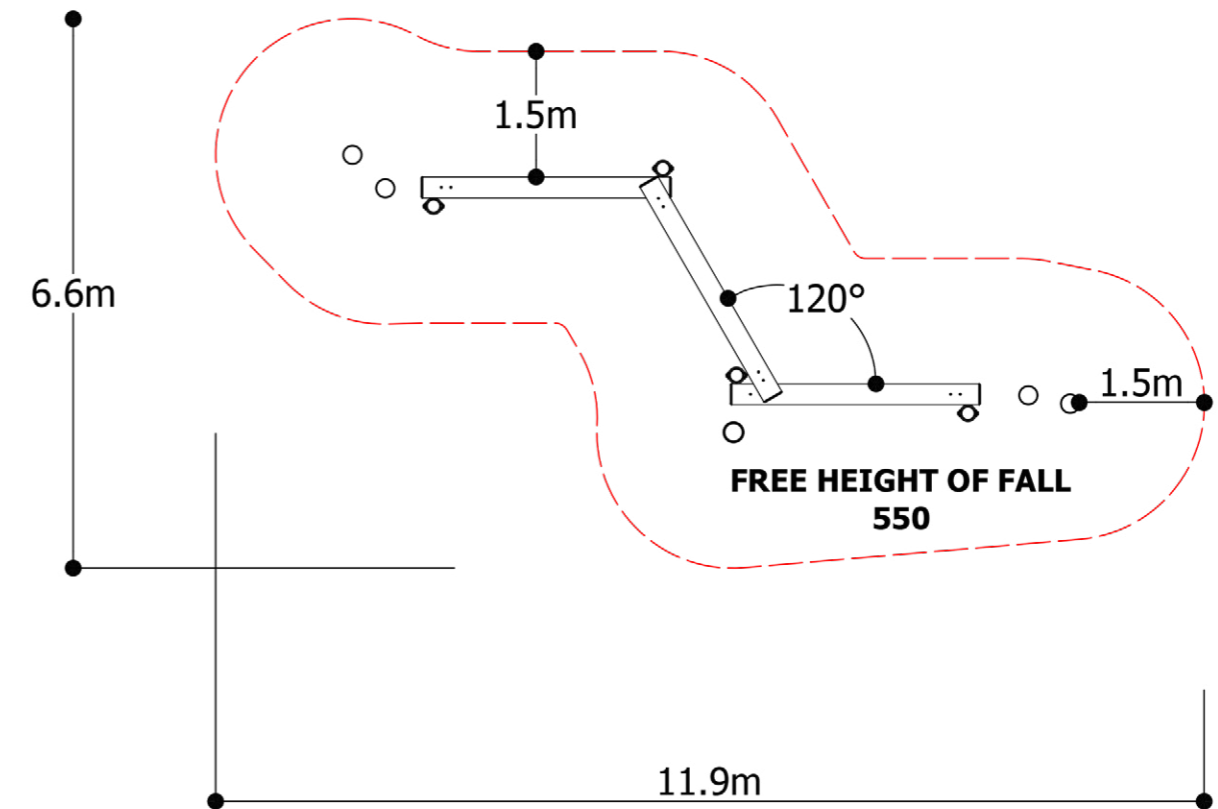

Please Note

Our Natura Play Elements ranges are made as original pieces, not mass-produced. The character of each piece will be affected by the individual timber available at the time of production. The above image should be used as a guide only. Whilst care is taken to select the best materials, timber is a natural material that is expected to seasonally expand and contract over time and when subjected to temperature extremes. We use Ironbark and Cypress timber in our designs, Cypress timber in particular is prone to fine checking and knots are very common. Accordingly, timbers supplied may have checks and knots that are not structurally compromising.

Log Balance Trail 01

A-NAT-2238

Item	Qty	Hole Diameter	Hole Depth
Product Name	0	0mm	0mm

Maintenance - Annual

Regular inspection for signs of insect or fungal attack and, where evident, cleaning and treating as appropriate.
Apply 2 coats of water-based decking oil every 6 months
Cracks will open and close with the weather, particularly dry heat or prolonged wet. Where significant (i.e. >5mm) they can usually be caulked with an exterior grade silicon (available in colours to suit). Where splinters form, they can be removed and sanded smooth before re-coating.

In areas of high exposure to sun, wind and rain more frequent treatments may be necessary.
Note: Ensure all replacement parts conform with manufacturers original specifications.
Note: In heavy use environment, more frequent inspection regime recommended.
Note: Quarantine equipment during installation, inspection & maintenance.

Installation

Footings quantities and depths

From ground level

Note

This product is designed for 300mm soft fall. Check the proposed on site softfall depth. If it is not 300mm please adjust depths of post holes accordingly to achieve correct overall subsurface depth. This will maintain correct height of equipment above undersurface level.

Inspection Notes

All inspections and maintenance to be carried out by competent people with the appropriate knowledge, experience and authority.

Inspection Frequencies

These are a guide only - local risk factors such as heavy usage, nearness to coast, and vandalism patterns need to be taken into account.

Routine Visual Inspection - Daily

Check for breakages, loose fittings and debris. Where safety issues are identified, quarantine until repaired.

Operational Inspection - Quarterly

RVI plus:-

Check for wear in moving parts e.g. bearings, chains and links. Check security of fixings.

Comprehensive Inspection - Annually

OI plus:-

Check for structural rigidity and degradation e.g. corrosion, decay etc. Where possible, remove undersurfacing to examine condition of supports and footings.